


KABEL VSTUPU Z POHONU KOLLMORGEN SEIDL SERVOSTAR 600 - SU5
ENCODER SIMULATION CABLE FOR SERVOSTAR 600 DRIVE - SU5 BOARD

DB9	DB15	BARVA/COLOUR	PR.	DES.
7	11	SEDA/GREY	0.08	B/
1	6	RUJA/RED	0.35	GND
2	14	CERNA/BLACK	0.08	Z
3	7	RUJA/RED	0.08	Z/
5	1	ZELENA/GREEN	0.08	A
4	9	ZLUTA/YELLOW	0.08	A/
6	3	MODRA/BLUE	0.08	B
PLECH	15, PLECH	STINENI/SHIELD		SHIELD
1	2	MODRA/BLUE	0.35	GND
1	2	CERNA/BLACK	0.35	GND
-	5, 12	-		+5V

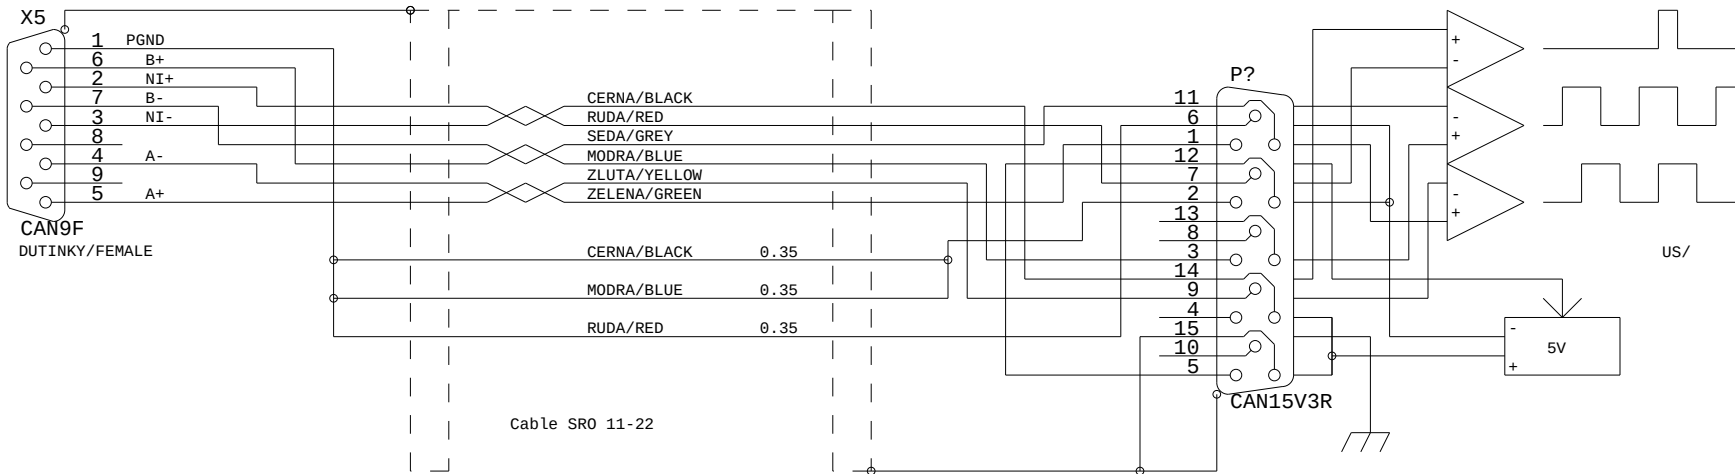

V konstante 294 je nutno nastaviti 65 (pocatečni napeti pro IRC)

Machine constant 294 must be set to 65 (initial encoder supply voltage)