



KABEL OPTICKEHO SNIMACE (IRC205, PRAVITKO RSF)

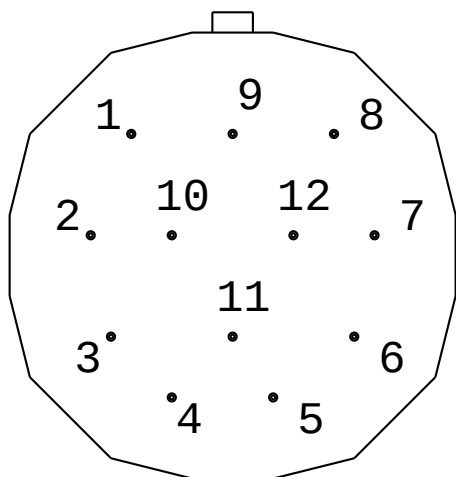

CONNECTOR CONNEI


K121	DB15	BARVA/COLOUR	PR.	DES.
1	10	SEDA/GREY	0.08	T2/
2, 12	7, 8	RUDA/RED	0.35	5V
3	9	CERNA/BLACK	0.08	RI
4	2	RUDA/RED	0.08	RI/
5	4	ZELENA/GREEN	0.08	T1
6	11	ZLUTA/YELLOW	0.08	T1/
7	5	HNEDA/BROWN	0.08	US/
8	3	MODRA/BLE	0.08	T2
9	1, PLECH	STINENI/SHIELD		SHIELD
10, 11	14, 15	MODRA/BLE	0.35	0V
2, 12	6	CERNA/BLACK	0.35	SENS 5V

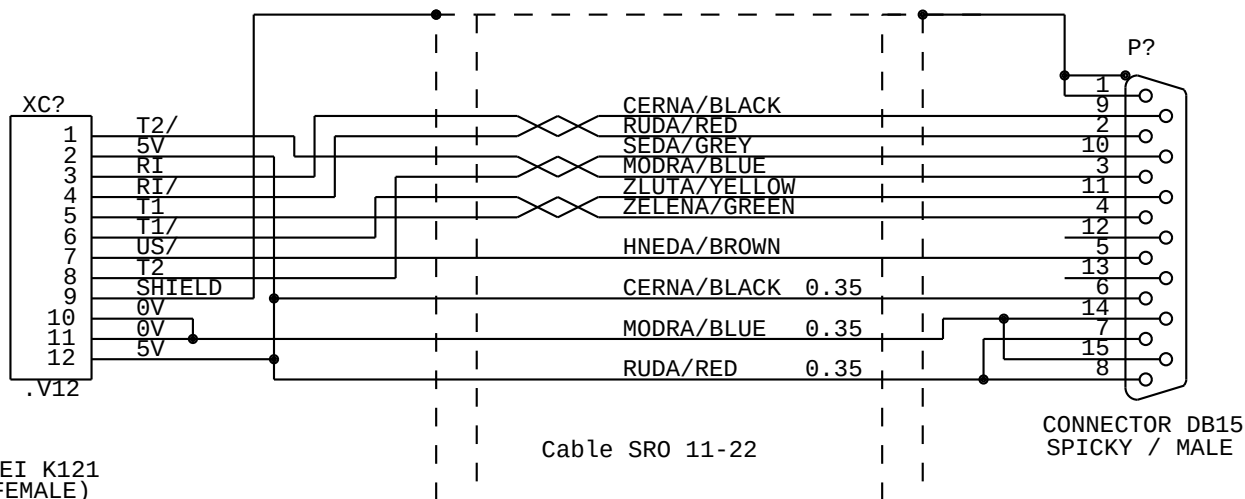

KONEKTOR CONNEI K121
(DUTINKY - FEMALE)

Cable SRO 11-22

CONNECTOR DB15
SPICKY / MALE

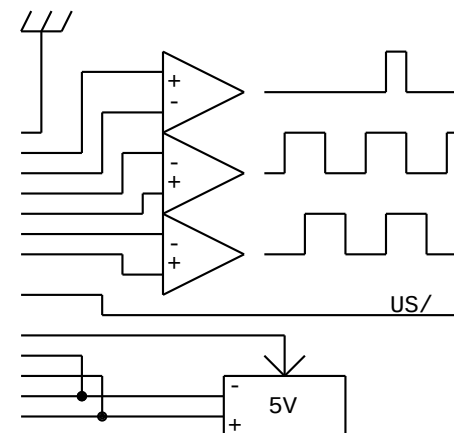

Spicky 2 a 12 spojit pouze
v konektoru K121 u snimace!

Pins 2 and 12 conected only in connector K121 adjacent to encoder!

MEFI s.r.o.

Size	Document Number	REV
A	W-IRC5	
Date:	October 30, 1997	Sheet of