



KABEL OPTICKEHO SNIMACE (IRC205, PRAVITKO RSF) -SU5 OPTICAL ENCODER CABLE (IRC205,RSF)

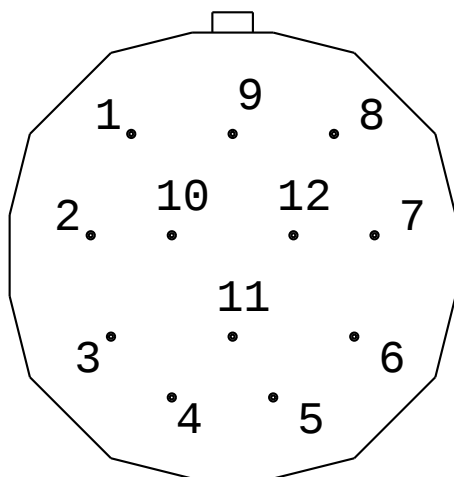

CONNECTOR CONNET
POHLED ZE STRANY PAJENI
LOOK FROM SOLDER SIDE

K121	DB15	BARVA/COLOUR	PR.	DES.
1	11	SEDA/GREY		T2/
2	4	HN.ZEL/GREEN.BROWN	0.5	5V
2	12	HNEDA/BROWN		SENS 5V
3	14	CERNA/BLACK		RI
4	7	RUDA/RED		RI/
5	1	FIALOVA/VIOLET		T1
6	9	ZLUTA/YELLOW		T1/
7	13	ZELENA/GREEN		US/
8	3	RUZOVA/PINK		T2
9	15, PLECH	STINENI/SHIELD		SHIELD
10	2	ZEL.BIL/GREEN.WHITE	0.5	0V
11	6	MODRA/BLUE	0.5	0V
12	5	BILA/WHITE	0.5	5V

Cable LAPPKABEL 0LLFLEX-SERVO-FD-770 CP 4x2x0,14+4x0,5

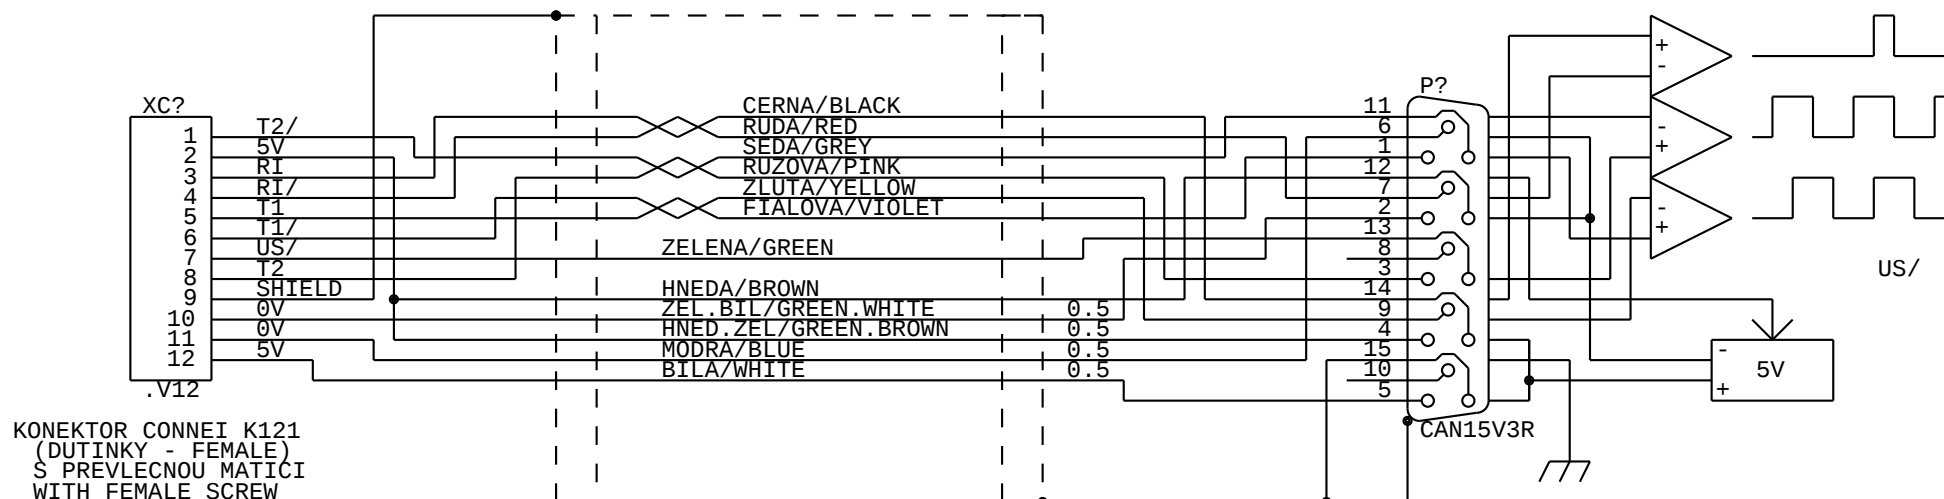

KONEKTOR CONNET K121
(DUTINKY - FEMALE)
S PREVLECNOU MATICI
WITH FEMALE SCREW

Hneda a hnodozelena spojeny pouze
v konektoru K121 u snimace!

Brown and green-brown conected only in connector K121 adjacent to encoder!

MEFI s.r.o.		
Size	Document Number	REV
A	W-IRC32	
Date:	July 31, 2003	Sheet of