

KABEL 2 DOTYKOVYCH SNIMACU HEIDENHEIN TS120

2 HEIDENHEIN TOUCH PROBE SYSTEMS TS120 CABLE

PROBE2

ZLUTA/YELLOW
ZELENA/GREEN
HNEDA/BROWN
BILA/WHITE

XC1
6
5
4
3
2
1
LEMOSA

CABLE MK4x0,5

PROBE1

ZLUTA/YELLOW
ZELENA/GREEN
HNEDA/BROWN
BILA/WHITE

XC2
6
5
4
3
2
1
LEMOSA

220

220

CABLE MK4x0,5

ODPORY NUTNE POUZE
PRI ODPOJOVANI SONDY


A RESISTORS ARE NECESSARY
ONLY IF PROBE IS REMOVABLE

POKUD NENI SONDA 2 VUBEC ZAPOJENA, JE NUTNO SPOJIT SPICKY 6 A 14 NA P3

PINS 6 AND 14 ON P3 MUST BE CONNECTED, IF PROBE 2 NOT USED AT ALL

PROPOJKY 1-6 A 4-12 NA P3 MUSI BYT I POKUD JE POUZE JEDNA SONDA

PINS 1-6 AND 4-12 ON P3 MUST BE CONNECTED EVEN IF ONLY ONE PROBE

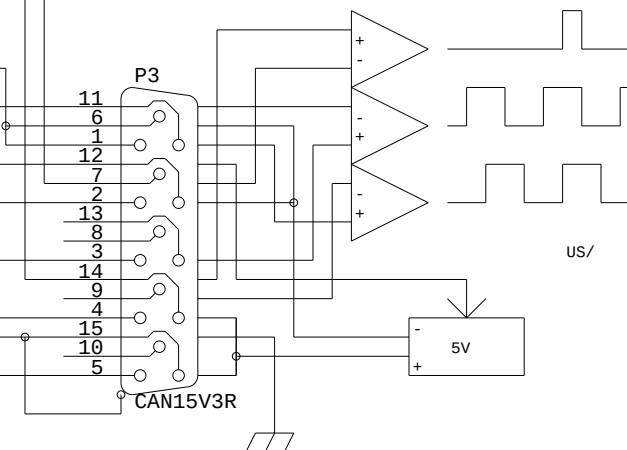

MEFI s.r.o.		
Size A	Document Number W-TPS2A	REV 2
Date:	May 10, 2007	Sheet of